

Moneris® Go

Integration Guide



Documentation Version: 1.2.2

Documentation Date: April 30, 2024

Contents

1.	Document Control	4
2. 2.1 2.	Introduction to Integration Solutions	6
3. 3.1 3.2	Communication Integration modes and communications supported Preparing your firewall (Wi-Fi and Ethernet connection)	7
4. 4.1	Getting Started Development resources from Moneris	
5. 5.1 5.2 5.3 5.	Implementing App to App Integration	10 11 11
6. 6.1 6.2	Implementing Cloud Integration Cloud requirements	13
7. 7.1 7.2	Implementing Direct Integration Direct integration pre-requisites Hardware and direct integration device setup	14
8.1 8.2 8.3 8.4	Tokenization on Moneris Go Terminals Implementing Tokenization Tokenization Supported Devices Tokenization Prerequisites Tokenization Flow	15 15 15
9.1 9.2 9.3 9.4 9.5 9.6	Dynamic Currency Conversion (DCC) on Moneris Go Terminals	18 18 18 19
10. 10.1 10.2	• ,	22

10.3	Store and Forward Configuration	23
	Clearing Stored Transactions from the Terminal	
11. I	Installments by Visa on Moneris Go Terminals	25
11.1	Supported Terminals	25
11.2	Enabling Installments by Visa	25
11.3	Supported Cards and Interface	25
11.4	User Experience	26
11.5	What Integrators need to know?	26
12. 9	Support	29
	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	

# 1. Document Control

Version	Date	Section	Summary of changes
1.0	Aug-10-2023	All sections	Initial release
1.0.2	Oct-12-2023	5.0 Implementing App to App Integration	Whitelist of IPs and Track
1.1.2	Mar-6-2024	8.0 Implementing additional features on Go terminals	This is a new section
		2.1 Obtaining integration documentation	This is a new section
		3.1 Integration modes and communications supported	Updated chart
		5.0 Implementing App to App Integration	Updated Ingenico – App to App Integration section
1.2.2	Apr-30-2024	8.0 Implementing additional features on Go terminals	Renamed section to Tokenization on Moneris Go Terminals
		9.0 Dynamic Currency Conversion (DCC) on Moneris Go Terminals	This is a new section
		10.0 Store and Forward (SAF) on Moneris Go Terminals	This is a new section
		11.0 Installments by Visa on Moneris Go Terminals	This is a new section

# 2. Introduction to Integration Solutions

This guide will help you to integrate your secure, PCI-compliant Moneris Go terminal with your own application(s). This will allow your customers to respond to prompts on screen (including tip prompts), and to safely enter their card information. There are three available modes of integration.

#### App to App Integration

In this mode, you build your own **Android application** for your customers to use on the Moneris Go terminal. When customers want to make an in-app purchase, your application connects to the Moneris payment application on the terminal using our application programming interface (API). The Moneris payment application takes care of transaction processing by communicating with the Moneris host. Your customers simply respond to the prompts on screen to make purchases quickly and securely using their debit or credit card(s).

To integrate Moneris Go with your own Android application, please refer to *Moneris Go - App to App and Direct Integration - API Specification* document.

#### **Cloud Integration**

In this mode, you build your own **point of sale (POS) application** which runs on a separate device. Your POS application connects to the Moneris terminal through the internet and Moneris' Cloud server. You start transactions on your POS application. Transaction requests are sent through the internet to Moneris' Cloud server which routes the transaction to the appropriate payment terminal. The Moneris payment application on the terminal takes care of transaction processing by communicating with the Moneris host. Your customers simply respond to the prompts on screen to make purchases quickly and securely using their debit or credit card(s).

To integrate Moneris Go with your POS application, please refer **to Moneris Go Cloud 3.0 - API Specifications Cloud API** document.

#### **Direct Integration**

In this mode, you build your own **point of sale (POS) application** which runs on a separate device. Your POS application connects to the Moneris terminal over your local network using Wi-Fi or Ethernet. Transactions are started on your POS application which passes the transaction request to the terminal. The Moneris payment application on the terminal takes care of transaction processing by communicating with the Moneris host. Your customers simply respond to the prompts on screen to make purchases quickly and securely using their debit or credit cards(s).

To integrate Moneris Go with your POS application, please refer to *Moneris Go App to App and Direct Integration - API Specification* document.

## 2.1 Obtaining integration documentation

The Moneris Client Consulting team provides merchants and integrators with the following documentation:

- Moneris Go App to App and Direct Integration API Specification
- Moneris Go Cloud 3.0 API Specifications Cloud API
- Moneris Unified Gateway API Specification
- Moneris Unified eCommerce API Specification

#### 2.1.1 Other documentation resources available online

Here are other support resources that are available online:

- Moneris has its own GitHub page, which contains APIs for Moneris eCommerce and Gift & Loyalty products; visit <a href="https://github.com/orgs/Moneris/repositories?type=all">https://github.com/orgs/Moneris/repositories?type=all</a>
- The Moneris Developer Portal contains information on how to integrate, a list of APIs and documentation, DTD or Java .NET & PHP libraries, and FAQs; visit <a href="https://developer.moneris.com/">https://developer.moneris.com/</a>
- You can access PAX resources via the PAX developer portal; visit <a href="https://developer.pax.us/">https://developer.pax.us/</a>
- You can access Ingenico resources via the Ingenico developer portal; visit <a href="https://ingenico.com/ca-en/developers">https://ingenico.com/ca-en/developers</a>

## 3. Communication

Moneris Go terminals can communicate in various ways.

# 3.1 Integration modes and communications supported

Device Model Mode>>>	s	tandalon	e		Direct		А	pp to Ap	р		Cloud	
Communication>>>	Ethernet	Wi-Fi	Cellular	Ethernet	Wi-Fi	Cellular	Ethernet	Wi-Fi	Cellular	Ethernet	Wi-Fi	Cellular
Moneris Go - PAX A920	N/A	✓	✓	N/A	✓	N/A	N/A	✓	✓	N/A	✓	✓
Moneris Go Unattended - PAX IM30	N/A	N/A	N/A	✓	✓	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Moneris Go PinPad - PAX A35	N/A	N/A	N/A	✓	✓	N/A	N/A	N/A	N/A	✓	✓	N/A
Moneris Go Plus - DX8000	√1	✓	✓	√1	✓	N/A	√1	✓	✓	<b>√</b> ¹	✓	✓
Moneris Go Slim - EX8000	N/A	N/A	N/A	N/A	✓	N/A	N/A	✓	✓	N/A	✓	✓

^{1.} Functional base required for Ethernet

The terminal can communicate with Moneris, your Electronic Cash Register (ECR) application or manufacturer provided services using any of the communications supported in the above table. When using ethernet or Wi-Fi communication, it would be your responsibility to configure the network so Moneris terminal(s) can communicate with required URL's.

# 3.2 Preparing your firewall (Wi-Fi and Ethernet connection)

Please refer to Merchant Network Readiness Checklist



# 4. Getting Started

You will need to ensure you have the necessary items for both test and production environments.

## 4.1 Development resources from Moneris

Check that you have the following items:

- Debug terminal (for App to App only)
- QA Terminal (for Cloud and Direct only)
- API specification for your desired integration mode
- A set of Moneris test cards
- Moneris account credentials for test and portal:

Environment	Account credentials
Test	<ul> <li>Merchant ID (MID) consisiting of 13 numeric digits beginning with 0030</li> <li>Associated Store ID (alphanumeric, typically beginning with mogo- or gwca-)</li> <li>Terminal ID (TID) consisting of 8 characters</li> <li>QA Go Portal account (<i>required prior to device setup</i>)</li> <li>API token (for Cloud and to support Tokenization)</li> </ul>
Production	<ul> <li>Merchant ID (MID) consisiting of 13 numeric digits beginning with 0030</li> <li>Associated Store ID (alphanumeric, typically beginning with mogo- or gwca-)</li> <li>Production Terminal ID (TID) consisting of 8 characters</li> <li>Production Go Portal account (<i>required prior to device setup</i>)</li> <li>API token (for Cloud and to support Tokenization)</li> </ul>

If anything is missing, contact your Moneris Client Consultant for assistance with ordering equipment and setting up the related test account(s).

# 5. Implementing App to App Integration

You can incorporate App to App integration by following a few steps.

#### 3.X PAX – App to App Integration

Using app to app integration, you can deploy your own Android application on Moneris terminals allowing your customers to make purchases quickly and securely. Follow this guide to:

- Get access to PAX resources and receive your debug terminal(s) communication with the Client Consultant
- Work with Moneris' teams for the following tasks:

#### Whitelist of IPs1

Moneris provided SIM cards route network traffic through a custom Moneris APN. For any third party applications operating on our terminal, it is important to ensure that the IP addresses of any URLs or endpoints required for application operation are provided to Moneris. Communication to IPs not explicitly whitelisted by Moneris will be blocked.

## Whitelist Track²

The API command getTrackData can be leveraged to read track2 data. In order to read and accept third party Gift and Loyalty card track2 data using the terminals card reader, you will be required to work with Moneris representative to whitelist the BIN range(s) for those cards. Moneris will require the low and high BIN range along with length of each BIN range. Example: 625173-625173(16) or 62162434626–62162434626(19).

- Test your application within your PAX test store
- Once your application is successfully deployed into the PAX Global marketplace, please work with Moneris representatives to subscribe to the application – adding it to the Moneris PAX test and production marketplace.

¹Please work with your Moneris representative to whitelist all IPs your application(s) will be communicating with. This includes middleware and APIs. While our telecom partners only have the ability to whitelist by IPs, Moneris will still require the URL. It is your responsibility to inform Moneris should there be any change to IP addresses. Telcos require 8 to 10 weeks to implement change. These timelines may change due to holiday season or any telco's embargo in affect.

²It is your responsibility to inform Moneris should there be any change to the bin-ranges. Moneris is not held responsible should there be any change. Moneris turn-around time to implement bin-ranges is approximately 2 to 4 weeks assuming all accurate data has been provided.

#### Ingenico – App to App Integration

Using app to app integration, you can deploy your own Android application on Moneris terminals allowing your customers to make purchases quickly and securely. Follow this guide to:

- Get access to Ingenico resources and receive your debug terminal(s) communication with the Client Consultant
- Work with Moneris' teams for the following tasks:

#### Whitelist of IPs1

Moneris provided SIM cards route network traffic through a custom Moneris APN. For any third party applications operating on our terminal, it is important to ensure that the IP addresses of any URLs or endpoints required for application operation are provided to Moneris. Communication to IPs not explicitly whitelisted by Moneris will be blocked.

#### Whitelist Track²

The API command getTrackData can be leveraged to read track2 data. In order to read and accept third party Gift and Loyalty card track2 data using the terminals card reader, you will be required to work with Moneris representative to whitelist the BIN range(s) for those cards. Moneris will require the low and high BIN range along with length of each BIN range. Example: 625173-625173(16) or 62162434626–62162434626(19).

- Provide your signed test application to Moneris. Moneris will upload the app to the QA Ingenico store. You can then download the application on your QA devices for testing.
- Once tested, please work with Moneris representatives to promote the application to the production store.

¹Please work with your Moneris representative to whitelist all IPs your application(s) will be communicating with. This includes middleware and APIs. While our telecom partners only have the ability to whitelist by IPs, Moneris will still require the URL. It is your responsibility to inform Moneris should there be any change to IP addresses. Telcos require 8 to 10 weeks to implement change. These timelines may change due to holiday season or any telco's embargo in affect.

²It is your responsibility to inform Moneris should there be any change to the bin-ranges. Moneris is not held responsible should there be any change. Moneris turn-around time to implement bin-ranges is approximately 2 to 4 weeks assuming all accurate data has been provided.

## 5.1 Summary of the process

Below are the high-level steps in the process:

#### Development and testing:

- 1. Develop your own application on a test (debug) terminal from Moneris (refer to section <u>4.1</u> <u>Development resources from Moneris</u> for more information).
- 2. Upload test application to the PAX test marketplace. Refer to the <u>PAX developer centre</u> for instructions.

#### Production:

- 1. Upload your production application to the PAX production marketplace
- 2. PAX signs your application and makes it available to customers
- 3. Moneris subscribes to your application so that it can be downloaded to Moneris terminals
- 4. Download your application from the Moneris QA and Production PAX marketplace to your production Moneris terminal

Review each section below to understand how to proceed.

## 5.2 Contact Moneris

Once you contact <u>Moneris</u>, you will be assigned a Client Consultant who will coordinate your development journey. Moneris will set up a call with PAX to ensure you receive:

- The PAX non-disclosure agreement
- A PAX legal agreement for each development (debug) terminal you request
- Access to the PAX developer portal and test marketplace

Once you sign and return all legal agreements to PAX, Moneris will send you the debug terminal(s) and test cards.

## 5.3 Develop and test your android application

In addition to the standard Android development tools, you will need the Moneris Go API specification to call the Moneris Go payment application. Please refer to your Moneris Client Consultant on how to obtain the Moneris App to App developer documentation, a PAX A920 debug terminal and test cards.

## 5.3.1 Application requirements

Your application must conform to the following requirements:

- Printing done using Moneris' receipt API. Receipts must be stored electronically so they can be reprinted if required
- Payment transaction data must be retained for 24 months

**Note**: This list is not exhaustive. Refer to the Moneris API specification for complete requirements.

## 5.4 Promote your application to production

Follow the steps below to make your application available in the terminal's app store.

#### PAX

In order for the application to be made available in the PAX store, you are required to upload the application to PAX's production PAX store marketplace. Once PAX has signed the application, it would be your responsibility to inform your Moneris representative. Your Moneris representative will then inform the appropriate group to execute the application subscription process¹.

Once Moneris has subscribed to the application, it would be made available for download on all Moneris devices².

¹This task may take 1 to 2 weeks

²Moneris doesn't have the capability to push updates to sets of terminals. It would be your responsibility to inform the merchants so they can update the application.

## Ingenico

In order for the application to be made available in the Ingenico app store, you are required to sign the application with the tools provided by Ingenico (If the integrator does not have an Ingenico signing kit, obtain signing card from Ingenico¹).

Once the application has been signed, you will work with Moneris representative to get the application loaded to the Ingenico app store².

¹This task may take 6 to 8 weeks

²Moneris doesn't have the capability to push updates to set of terminals. It would be your responsibility to inform the merchants so they can update the application.

# 6. Implementing Cloud Integration

This section describes how to put your Moneris Go terminal into cloud integration mode. Once the terminal connects to the Moneris cloud, you can send transactions from your point of sale (POS) software to the terminal for processing. Your customers can use the terminal to securely enter their payment cards and leave tips.

## 6.1 Cloud requirements

- Gateway store ID and API token
  - For QA, refer to your Client Consultant to obtain your store ID and API token
  - For Production, your store ID and API token are available through Merchant Direct

Note: QA and Production credentials will differ.

Moneris API documentation (Cloud 3.0 documentation, optional Gateway Unified API documentation)

## 6.2 Hardware and cloud integration device setup

Please refer to your device's specific getting started guide for instructions on how to setup your payment terminal in Cloud operating mode. Once initial setup has been complete, simply power on your device to sync the settings with Moneris.



When you see the idle screen (showing the Moneris logo with the date and time), the device is ready to process transactions sent from your POS software.

# 7. Implementing Direct Integration


This section describes how to put your Moneris Go terminal into direct integration mode. You can send transactions from your point of sale (POS) software to the terminal for processing over your local area network. Your customers can use the terminal to securely enter their payment cards and leave tips.

## 7.1 Direct integration pre-requisites

- Local IP address and port of your terminal for communication
- Moneris API documentation (Moneris Go App to App and Direct documentation, optional Gateway Unified API documentation)
  - Usage of the optional Gateway Unified API will require your Gateway store ID and API token

## 7.2 Hardware and direct integration device setup

Please refer to your device's specific getting started guide for instructions on how to setup your payment terminal in Direct operating mode. Once initial setup has been complete, simply power on your device to sync the settings with Moneris.



When you see the idle screen (showing the Moneris logo with the date and time), the device is ready to process transactions sent from your POS software.

## 8. Tokenization on Moneris Go Terminals

## 8.1 Implementing Tokenization

This section describes how to implement tokenization features on your Moneris Go terminal for Direct, App to App and Cloud integration mode. Once the integration has been completed and the tokenization feature is enabled, you need to leverage the eCommerce-Unified_API in order to create, store and manage your tokens via the Moneris Vault.

## 8.2 Tokenization Supported Devices

Product Name - Device Model	Operational Modes					
Product Name - Device Model	Standalone	Direct	App to App	Cloud		
Moneris Go - PAX A920	N/A	✓	✓	✓		
Moneris Go Unattended - PAX IM30	N/A	✓	N/A	N/A		
Moneris Go PinPad - PAX A35	N/A	✓	N/A	✓		
Moneris Go Plus - DX8000	N/A	✓	<b>√</b>	✓		
Moneris Go Slim - EX8000	N/A	✓	✓	✓		

## 8.3 Tokenization Prerequisites

- Gateway store ID and API token
  - For QA, refer to your Client Consultant for assistance enabling Tokenization on your existing QA store if not enabled or for assistance obtaining a QA store if one does not exist
  - For Production, your store ID and API token are available through Merchant Direct

**Note:** QA and Production credentials will differ.

- Moneris Go API documentation (refer to section 2.1.1)
  - Moneris Go Cloud 3.0 API specification
  - Moneris Go App to App and Direct Integration API specification
- Moneris eCommerce-Unified_API (refer to section 2.1.1)
- DTD or JAVA, .NET, PHP libraries

## 8.4 Tokenization Flow

On your Moneris Go device, perform a Financial Transaction such as a Card Verification, Purchase or Pre-auth and retain the following information from a successful response:

orderId,

transactionId, alternatively known as transaction number

Financial Transactions include the following:

- Purchase
- Refund
- Void (aka Purchase Correction)
- Independent refund
- Pre-Auth
- Completion
- Card verification

Refer to **Moneris Go API** specifications for additional information.

Leveraging the eCommerce-Unified_API, perform a Vault Tokenize Credit Transaction request with the following object values:

#### Mandatory Object Values:

- orderId,
- transactionId, alternatively known as transaction number

### Sample Code (Tokenize Credit Transaction):

#### Optional Object Values:

- Customer ID
- Data Key
- Email Address
- Phone Number
- Note
- AVS Information*
- COF Information

*When passing AVS information the following value are mandatory:

- AVS street number
- AVE street name
- AVS zip/postal code

**Note 1:** A token cannot be generated in the event that a Moneris Go Device has been enabled for Store and Forward (SAF) and a transaction was approved offline.

Refer to **eCommerce-Unified_API** for additional information associated with adding a token.

Leveraging the eCommerce-Unified API for future financial transaction with credential on file:

- payment indicator: U
- payment information:

#### Sample Code (Purchase with Token):

```
1. <?xml version="1.0"?>
2. <request>
3. <store_id>gateway storeID</store_id>
4. <api token>API token</api token>
5. <status check>false</status check>
6. <res purchase cc>
    <amount>10.00</amount>
9.
9.
                <crypt type>7</crypt type>
11.
                <cof info>
                      <payment_indicator>U</payment indicator>
12.
                      <payment information>2</payment information>
13.
               </cof info>
14.
    </res_purchase_cc>
15.
16. </request>
```

**Note 2:** In the event of a pre-authorization via a Moneris Go Terminal followed by a token request, you have the option to leverage the token to perform a completion transaction, however, the orderID and transactionID must be sourced back to the original pre-auth transaction. Refer to the **eCommerce-Unified_API** or additional information associated with performing financial transactions via a token.

#### Managing tokens:

You may leverage the eCommerce-Unified_API in order to perform the following token management functions:

- Vault Update Credit Card
- Vault Delete
- Vault Look Up Masked
- Vault Get Expiring
- Vault Add Token

Refer to the **eCommerce-Unified_API** for additional information associated with performing token management functions.

# 9 Dynamic Currency Conversion (DCC) on Moneris Go Terminals

## 9.1 Implementing Dynamic Currency Conversion (DCC)

This section describes how Dynamic Currency Conversion (DCC) functions on Moneris Go devices and how integrators can support it. DCC is a feature that allows cardholders the option to pay either in their native currency or in Canadian dollars.

# 9.2 Dynamic Currency Conversion (DCC) Supported Devices

Device Model	Dynamic Currency Conversion (DCC)				
Modes>>>	Standalone	App to App	Cloud	Direct	
Moneris Go - PAX A920	N/A	N/A	N/A	N/A	
Moneris Go Unattended - PAX IM30	N/A	N/A	N/A	N/A	
Moneris Go PinPad - PAX A35	N/A	N/A	N/A	N/A	
Moneris Go Plus - DX8000	✓	✓	✓	✓	
Moneris Go Slim - EX8000	N/A	✓	✓	✓	

## 9.3 Enabling Dynamic Currency Conversion (DCC)

Your client consultant can enable DCC on your Go Devices. You should ensure your device is on the latest software version and sync your terminal with Moneris in order to start using DCC. To reinitialize your terminal, refer to the Using Your Terminal section of the Moneris Reference Guide available at moneris.com/en/support.


## 9.4 Supported Cards and Interface

DCC is available for Visa and Mastercard cards issued in a foreign currency for both Contact and Contactless interfaces.

**Note:** For Mastercard Contactless transactions, DCC is only offered for mobile wallets.

## 9.5 User experience

#### **Example of user screens:**

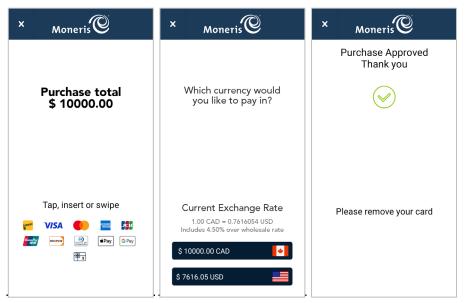

# 9.6 What Integrators need to know?

- There is no development required to support DCC and there are no parameters which need to be sent by the Electronic Cash Register (ECR) to offer DCC on the device.
- An optional DCC opt-in parameter is returned on the response. This is for information purpose only to indicate the cardholder has opt-in to the DCC offer.
- DCC is offered on Purchase, Independent Refund and Pre-Authorization & Completion transaction types. DCC is not offered for Refund transaction.

### Sample trace:

```
Request:
   "apiVersion": "3.0",
    "dataId": "1714061235658-001",
   "dataTimestamp": "2024-04-25 12:07:15",
   "data": {
     "request": [
       {
         "idempotencyKey": "4107c774-5d4d-4ab3-bfa6-aaa9e4cc2da6",
         "terminalId": "A2345678",
         "action": "purchase",
         "totalAmount": "1000000"
       }
     ]
Response:
 "receipt": {
   "apiVersion": "3.0",
   "dataId": "1714061235658-001",
   "statusCode": "5207",
   "status": "Approved",
   "dataTimestamp": "2024-04-25 12:07:43",
   "data": {
     "response": [
         "statusCode": "5207",
         "status": "Approved",
         "approvedAmount": "1000000",
         "totalAmount": "1000000",
         "cardType": "V ",
         "cardName": "VISA",
         "sequenceNum": "047",
         "realTimeUniqueId": "OSCIA4H6VUP4FY2",
         "responseCode": "027",
         "iso": "01",
         "authCode": "B48739",
         "maskedPan": "*********0004",
         "orderId": "MGO1714061241002",
         "transactionId": "1406-0 755",
         "idempotencyKey": "4107c774-5d4d-4ab3-bfa6-aaa9e4cc2da6",
         "action": "purchase",
         "terminalId": "A2345678",
         "saf": "false",
         "dccOptIn": "true",
         "tenderType": "Credit",
         "receiptChoice": "NONE",
         "receipt": "
                                                           \r\n
                       ----- TRANSACTION RECORD -----
                                                                              COFFEE STORE
                  \r\n
                              3300 BLOOR ST W
                                                              \r\n
                                                                               ETOBICOKE
                                                                  \r\nApr 25,2024
                                      Purchase
                  \r\n\r\n
                                                       12:07:29\r\nVISA
                  \r\nRef#: 047- OSCIA4H6VUP4FY2
                                                              \r\nAuth#: B48739 .....}
     ]
   },
 }
```

#### Sample DCC receipt:

----- TRANSACTION RECORD -----COFFEE STORE

3300 BLOOR ST W ETOBICOKE ON

Purchase

Apr 25,2024 12:07:29 VISA *********0004

Entry: Chip (C)

Ref#: 047- OSCIA4H6VUP4FY2

Auth#: B48739 Response: 01-027 Order: MG01714061241002

Amount \$ 10 000.00

RATE* 1 CAD = 0.7616054 USD

*BASE RATE + 4.5%

SELECTED TRANS CURRENCY

[ ] CAD 10 000.00 CAD [X] USD 7 616.05 USD

Total 7 616.05 USD

I have been offered a choice of payment currencies. This currency conversion service is offered by this merchant.

A0000000031010 VISA TVR 80C0008000 TSI 7800

Approved VERIFIED BY PIN

Important: Retain this copy for your record

# 10. Store and Forward (SAF) on Moneris Go Terminals

# 10.1 Processing Store and Forward (SAF)

This section describes how Store and forward (SAF) processing will allow credit transactions to be accepted at the terminal if connection to the Moneris host is unavailable. The transactions are processed later when a host connection is available.

#### The terminal will:

- selectively store financial transactions in a secure fashion should the Moneris host become unreachable
- forward the stored transactions to the host once it becomes available, so that they may be settled by the merchant.

When the host connection resumes, the terminal will send stored Visa and Mastercard transactions to the host as deferred authorization transactions and all other cards brands as force post transactions. These transactions will be sent in the background. This will allow new transactions to be accepted while SAF transactions are being forwarded.

#### **Transaction Types:**

- Purchase (EMV contact)
- Independent Refund (EMV contact)
- Purchase Void (for purchase transactions stored in the SAF memory)

### **Card Types:**

- Visa (Deferred Authorization)
- Mastercard (Deferred Authorization)
- American Express (Force Post)
- JCB (Force Post)
- Discover (Force Post)

#### **Interface Types:**

Insert

**Note:** Void itself is not SAF. It is available for use while store and forward processing is in effect. While communication is down, Void can be used to delete a SAF Purchase in the terminal memory. Void cannot be used to nullify a transaction authorized online prior to communication failure. The merchant must wait for communications to be re-established to void online transactions.

## 10.2 Store and Forward (SAF) Supported Devices

Device Model	Store and Forward (SAF)				
Modes>>>	Standalone	App to App	Cloud	Direct	
Moneris Go - PAX A920	N/A	N/A	N/A	N/A	
Moneris Go Unattended - PAX IM30	N/A	N/A	N/A	N/A	
Moneris Go PinPad - PAX A35	N/A	N/A	N/A	N/A	
Moneris Go Plus - DX8000	N/A	✓	N/A	✓	
Moneris Go Slim - EX8000	N/A	✓	N/A	✓	

## 10.3 Store and Forward Configuration

There are some limits associated with processing Store and Forward transactions which can be configured by your Client Consultant. These limits are as follows:

**Maximum Transaction Amount:** This corresponds to the maximum value of a transaction that can be processed in Store and Forward mode. For example, if a merchant's Maximum Transaction Amount limit is \$100.00, they will not be able to process any transactions that exceed \$100.00 while in Store and Forward mode.

**Note:** This limit does not apply to Independent Refund Transactions.

**Risk Limit:** This corresponds to the maximum cumulative amount of Store and Forward transactions that are permitted in a single calendar day. If the Risk Limit is reached, the terminal will not allow additional SAF transactions to be performed.

Risk limit is reset provided the terminal has:

- 1. re-established communication with the host
- 2. cleared all stored transactions
- 3. processed a transaction online

**Transaction Count Limit:** This corresponds to the maximum total number of Store and Forward transactions that can be stored on a terminal at once. This includes both Purchase and Independent Refund transactions.

# 10.4 Clearing Stored Transactions from the Terminal

When communication to the host is re-established, the terminal will automatically send any stored transactions in the background. The merchant can continue to use the terminal while SAF transactions are being sent in the background.

# 11. Installments by Visa on Moneris Go Terminals

Installments by Visa offers the cardholder (with the eligible card) the flexibility to pay for merchandise or services in equal payments over a defined period, and provides the cardholder with the option: Buy Now Pay Later (BNPL) during purchase.

## 11.1 Supported Terminals

Product Name - Device Model	Operational Modes					
Product Name - Device Woder	Standalone	Direct	App to App	Cloud		
Moneris Go - PAX A920	N/A	N/A	N/A	N/A		
Moneris Go Unattended - PAX IM30	N/A	N/A	N/A	N/A		
Moneris Go PinPad - PAX A35	N/A	N/A	N/A	N/A		
Moneris Go Plus - DX8000	<b>√</b>	✓	✓	✓		
Moneris Go Slim - EX8000	N/A	✓	✓	✓		

## 11.2 Enabling Installments by Visa


Your Client Consultant can help enable Installments by Visa on your Go Device. You should ensure your device is on the latest software version and sync your terminal with Moneris in order to start using Installments by Visa. To sync your terminal, refer to the Using Your Terminal section of the Moneris Reference Guide available at moneris.com/en/support.

## 11.3 Supported Cards and Interface

This feature is available for Visa, Mastercard and American Express cardholders when inserted or tapped.

## 11.4 User Experience

#### **Example of user screens:**

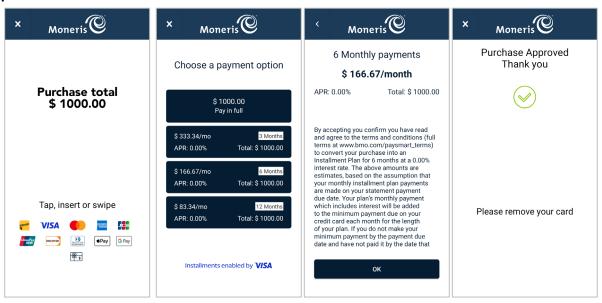

## 11.5 What Integrators need to know?

- Installment is offered on Purchase and Pre-Authorization transactions. For these transactions there are no parameters which need to be sent by the Electronic Cash Register (ECR) to offer Installments by Visa on the device.
- An installment opt-in parameter is returned on the response to indicate the cardholder has selected an installment plan.
- When initiating Independent Refund transaction, the real time unique identifier parameter must be sent. This information must match the value received from the Purchase response.

### **Sample Trace:**

```
Request
  "apiVersion": "3.0",
 "dataId": "1714074129526-001",
 "dataTimestamp": "2024-04-25 15:42:09",
  "data": {
    "request": [
       "idempotencyKey": "51283cb9-f551-428a-8ce8-417c40877ffa",
       "terminalId": "A2345678",
       "action": "purchase",
       "totalAmount": "100000"
     }
    ]
  }
}
Response
  "receipt":
    "apiVersion": "3.0",
   "dataId": "1714074129526-001",
    "statusCode": "5207",
   "status": "Approved",
    "dataTimestamp": "2024-04-25 15:42:29",
    "data": {
     "response": [
         "statusCode": "5207",
         "status": "Approved",
         "approvedAmount": "100000",
          "totalAmount": "100000",
         "cardType": "V ",
          "cardName": "VISA",
          "sequenceNum": "010",
          "realTimeUniqueId": "0SCIK2O4R8MMDG0",
          "responseCode": "027",
          "iso": "01",
          "authCode": "B44893",
          "maskedPan": "********3925",
          "orderId": "MGO1714074135255",
          "transactionId": "191-0 755",
          "idempotencyKey": "51283cb9-f551-428a-8ce8-417c40877ffa",
          "action": "purchase",
          "terminalId": "A2345678",
          "saf": "false",
          "installmentOptIn": "true",
          "tenderType": "Credit",
          "receiptChoice": "PRINT",
          "receipt": " ----- TRANSACTION RECORD ----- \r\n
                                                                              COFFEE ...."
     ]
    },
```

#### Sample Installment by Visa receipt:

----- TRANSACTION RECORD -----

COFFEE SHOP 3300 BLOOR ST ETOBICOKE ON

M8X2X2

Purchase

Apr 25,2024 15:42:24 VISA ********3925

Entry: Chip (C)

Ref#: 010- OSCIK2O4R8MMDG0

Auth#: B44893 Response: 01-027 Order: MG01714074135255

Amount \$ 1 000.00

Monthly Payment \$ 166.67

Number of Installments 6

APR 0.00%

Total Cost \$ 1 000.00

A0000000031010 VISA CREDIT TVR 000020C000 TSI E800

Approved
Installments enabled by VISA

By accepting you confirm you have read and agree to the terms and conditions (full terms at www.bmo.com/paysmart_terms) to convert your purchase into an Installment Plan for 6 months at a 0.00% interest rate.

https://www.bmo.com/paysmart_ter

ms

Important: Retain this copy for your record

# 12. Support

To obtain support for the terminal solution, follow these directions.

Situation	Directions
Your integration or development provider requires support related to the API specifications and tools.	Contact your Moneris Client Consultant.
You are facing difficulties uploading your application to the PAX marketplace	Contact your PAX representative.
You are facing difficulties uploading your application to the Ingenico marketplace	Contact your Ingenico representative.



NOTICE OF CONFIDENTIALITY. This document contains information that is the proprietary and confidential property of Moneris. The recipient agrees to maintain this information in confidence and not reproduce or otherwise disclose this information.

MONERIS, MONERIS BE PAYMENT READY & Design and MERCHANT DIRECT are registered trade-marks of Moneris Solutions Corporation. All other marks or registered trade-marks are the property of their respective owners.

© 2024 Moneris Solutions Corporation, 3300 Bloor Street West, Toronto, Ontario, M8X 2X2. All Rights Reserved. This document shall not wholly or in part, in any form or by any means, electronic, mechanical, including photocopying, be reproduced or transmitted without the authorized consent of Moneris Solutions Corporation. This document is for informational purposes only. Neither Moneris Solutions Corporation nor any of its affiliates shall be liable for any direct, incidental, consequential or punitive damages arising out of use of any of the information contained in this document. Neither Moneris Solutions Corporation or any of its affiliates nor any of our or their respective licensors, licensees, service providers or suppliers warrant or make any representation regarding the use or the results of the use of the information, content and materials contained in this document in terms of their correctness, accuracy, reliability or otherwise. Your credit and/or debit card processing is governed by the terms and conditions of your agreement(s) for merchant credit/debit card processing services with Moneris Solutions Corporation. It is your responsibility to ensure that proper card processing procedures are followed at all times. Please refer to the *Moneris Merchant Operating Manual* (available at: moneris.com/support) and the terms and conditions of your applicable agreement(s) for credit/debit processing or other services with Moneris Solutions Corporation for details.

(MGo Int EN April 2024)